

## Gold Standard Toaster | GST



**GST-3V**



**GST-3V**  
with low-profile  
bun feeder



**GST-5V**

The Gold Standard Toaster is the latest development for Sonic restaurants. Available with three and five lanes, this dual-belt toaster can toast a variety of bread products, including crowns, heels, and Texas toast. The innovative design of the GST provides a consistent toast that eliminates the need for bun oil. This means a healthier product with 45 less calories and 5 less grams of fat as well as thousands of dollars in estimated annual savings on labor and bun oil compared to the VCT-1000.

The GST-3V features three toasting lanes and is available with a standard or low-profile bun feeder.

The GST-5V features five toasting lanes. It also has a front and rear landing zone so that it can easily fit into a dual-sided kitchen.


### FEATURES

- Provides a consistent, caramelized toast without using bun oil, saving operations 30-60 minutes in labor per day.
- No bun oil results in a healthier product with 45 less calories and 5 less grams of fat.
- No release sheets and no bun oil provides operations with significant annual savings.
- New energy-efficient design reduces heat loss and prevents outside surface of toaster from becoming hot.
- Delivers a hotter bun while providing 30% energy savings compared to other toasters.
- Continuously moving belts allow immediate feeding of buns without sticking.
- No bun marking, slipping, or sticking.
- Programmable temperature and motor speed settings ensure products are toasted properly.
- GST-5V: Use in new streamlined building with dual-sided kitchens.



# Gold Standard Toaster | GST

## Dimensions

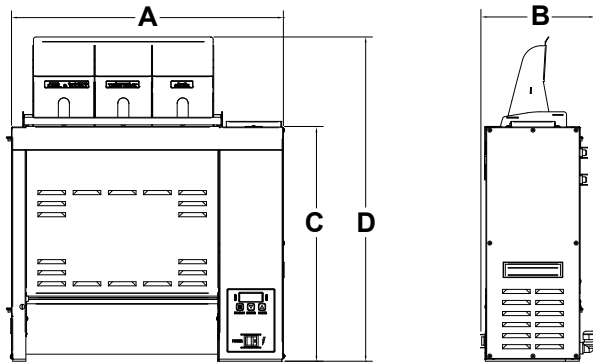

Model & Mfg. No.	Width (A)	Depth (B)	Height (C)	Height (D)
------------------	-----------	-----------	------------	------------

### With Standard Bun Feeder

GST-3V 9210876	25" (635 mm)	8 1/2" (216 mm)	22" (559 mm)	30" (762 mm)
-------------------	-----------------	--------------------	-----------------	-----------------

GST-5V 9210877	35" (889 mm)	20" (508 mm)	21 1/2" (546 mm)	29 1/2" (749 mm)
-------------------	-----------------	-----------------	---------------------	---------------------


### With Low-Profile Bun Feeder

GST-3V 9210878	25" (635 mm)	8 1/2" (216 mm)	22" (559 mm)	24 1/2" (622 mm)
-------------------	-----------------	--------------------	-----------------	---------------------


## Electrical Ratings and Plug Configuration

Model & Mfg. No.	Volts	Watts	Hertz	Plug Description
<b>With Standard Bun Feeder</b>				
GST-3V 9210876	208-240	3300-3840	50/60	NEMA 6-20P 20 Amp., 250 Volt Non Locking
GST-5V 9210877	208-240	5000-5760	50/60	Twist Lock L6-30P
<b>With Low-Profile Bun Feeder</b>				
GST-3V 9210878	208-240	3300-3840	50/60	NEMA 6-20P 20 Amp., 250 Volt Non Locking

## Additional Items

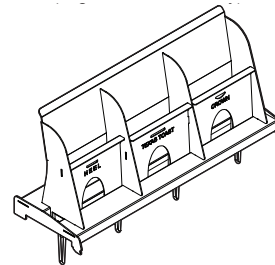

**Standard Bun Feeder**  
(P/N 0021924)

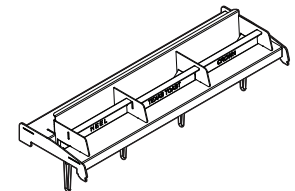

**Low-Profile Bun Feeder**  
(P/N 7001120)

P/N 1020441 12/16